

REV-8X652/ REV-8X752/ REV-8X862

PRODUCT SPECIFICATION



ULTRA HD 4K LCD TOUCH DISPLAY

Our displays modernize your boardroom or meeting room space with the latest technology and create a highly engaged experience. RevTouch eliminates all of the logistical headaches and challenges with traditional displays. Simple to use, easy to install, and incredibly low maintenance. No annual software subscriptions or difficult software to learn. RevTouch panels come in three sizes: 65", 75", and 86" LCD panels with energy-saving technology.

REVT TOUCH DISPLAYS COME WITH AN INTEGRATED PROCESSOR, 20 CONCURRENT TOUCH POINTS, GESTURE RECOGNITION, FAST RESPONSIVENESS, AND HIGH CONTRAST 1200:1 RATIO FOR RICH BLACKS AND SHARP COLOUR

- Ultra HD 4K resolution
- LED backlight, fast response time
- 180 degree viewing angle so everyone can see
- 9 inputs and outputs connects with virtually everything
- Built in speakers

ACCESSORIES:

- Mobile Stand (Basic or Electric)
- Wall Mount
- PC Module
- Screenshare dongle



Available in 3 sizes:

 65" / 75" / 86"

REVT TOUCH FEATURES



4K Resolution Display



3 Year Warranty



Integrated Speakers



Powered by Android



Energy Efficient



Fully Customizable



20-Point Touch



Remote Management



No Software
Subscription Fees



Anti-Glare




www.revtouch.com | 1 (800) 946-4421


9436 Southridge Park Ct., Suite 600, Orlando, FL 32819

	REV-8X652	REV-8X752	REV-8X862
DISPLAYS			
SIZE	65 inch	75 inch	86 inch
ASPECT RATIO	16:9	16:9	16:9
DISPLAY AREA	56.23" x 31.63"	64.95" x 36.53"	74.61" x 41.97"
RESOLUTION	3840 x 2160 Ultra HD	3840 x 2160 Ultra HD	3840 x 2160 Ultra HD
PIXEL PITCH	0.372 x 0.372 mm	0.429 x 0.429 mm	0.4935 x 0.4935 mm
RESPONSE TIME	6ms	8ms	8ms
REFRESHING FREQUENCY	60Hz	60Hz	60Hz
CONTRAST RATIO	1200:1	1200:1	1200:1
VIEWING ANGLE	178 degrees	178 degrees	178 degrees
BRIGHTNESS	350 cd/m²	350 cd/m²	350 cd/m²
LIFE TIME	30000 Hours	30000 Hours	30000 Hours
POWER			
POWER REQUIREMENTS	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz	AC 100-240V, 50/60Hz
OVERALL POWER REQUIREMENT	300W	450W	500W
STANDBY POWER REQUIREMENT	≤0.5W	≤0.5W	≤0.5W
INCLUDED CABLES	Power Cord (3m), USB (5m), VGA (5m), HDMI (3m), Audio (5m)		
DIMENSIONS & WEIGHT			
PRODUCT DIMENSION L*H*D	59.88" x 35.98" x 3.86"	69.41" x 40.71" x 3.94"	78.27" x 46.38" x 3.94"
SHIPPING DIMENSIONS L*W*H	66.81" x 8.66" x 42.17"	75.31" x 11.02" x 48.23"	87.05" x 11.02" x 53.94"
WALL-HANGING SCREW SPEC	M8*25mm	M8*25mm	M8*25mm
THICKNESS OVERALL	5.67"	5.75"	5.75"
PRODUCT WEIGHT	45.6kg (100.53lbs)	58.6kg (129.19lbs)	75.5kg (166.45lbs)
SHIPPING WEIGHT	55kg (121.25lbs)	78kg (171.96lbs)	105kg (231.49lbs)
VESA MOUNTING POINTS	600mm x 400mm	800mm x 400mm	800mm x 600mm
INTERACTIVITY			
COMPATIBLE SYSTEMS	Windows (10/8/7/Vista/XP/2000) / Linux / Mac / Android	Windows (10/8/7/Vista/XP/2000) / Linux / Mac / Android	Windows (10/8/7/Vista/XP/2000) / Linux / Mac / Android
TOUCH POINT	20 points touch	20 points touch	20 points touch
MINIMUM OBJECT SIZE	2mm	2mm	2mm
TOUCH TOOLS	Finger, glove, stylus	Finger, glove, stylus	Finger, glove, stylus
TOUCH RESPONSE TIME	<15ms	<15ms	<15ms
ACCURACY	±1mm (over 90% Area)	±1mm (over 90% Area)	±1mm (over 90% Area)
SURFACE HARDNESS	4mm Toughened Glass, Super Smooth	4mm Toughened Glass, Super Smooth	4mm Toughened Glass, Super Smooth
SMART PANEL SYSTEM			
SYSTEM VERSION	Android 7.0	Android 7.0	Android 7.0
CPU	ARM Cortex A73 Dual Core CPU	ARM Cortex A73 Dual Core CPU	ARM Cortex A73 Dual Core CPU
GPU	Mali 450 5-core	Mali 450 5-core	Mali 450 5-core
RAM/ROM	2GB / 16GB	2GB / 16GB	2GB / 16GB
ENVIRONMENTAL CONDITIONS			
OPERATING/ STORAGE TEMPERATURE	0°C to 40°C / -20°C to 60°C	0°C to 40°C / -20°C to 60°C	0°C to 40°C / -20°C to 60°C
OPERATING/ STORAGE HUMIDITY	10% - 90% RH	10% - 90% RH	10% - 90% RH
PANEL WARRANTY			
STANDARD	3 Year	3 Year	3 Year


REV-8X652

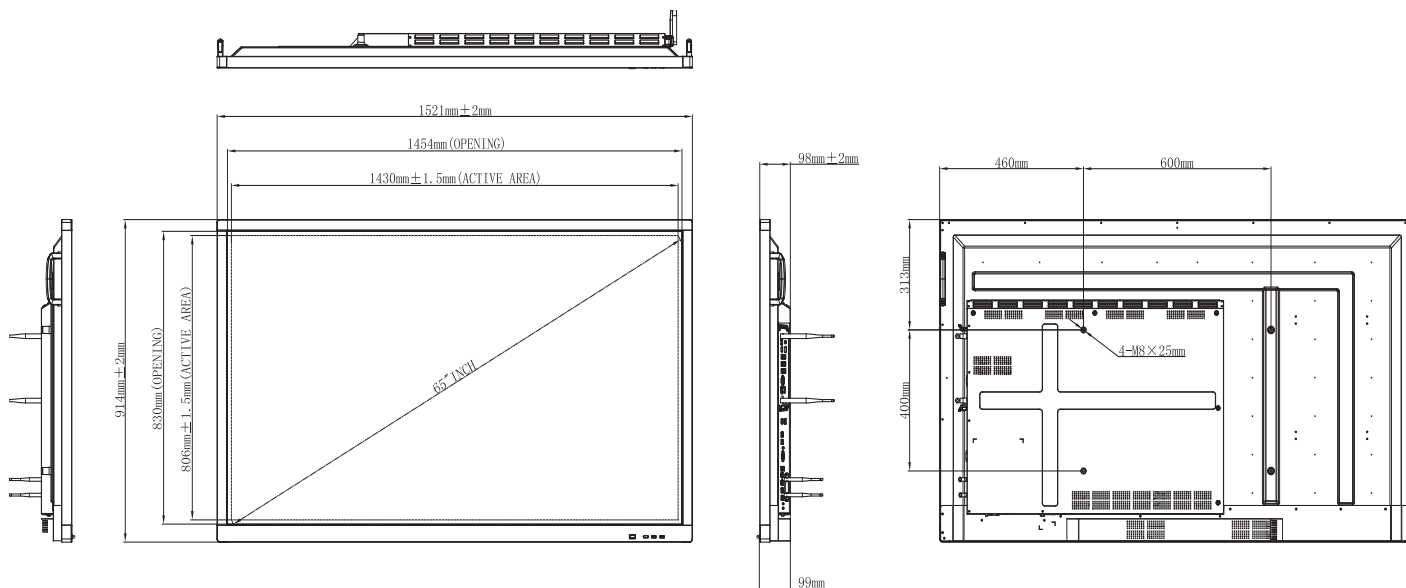

REV-8X752

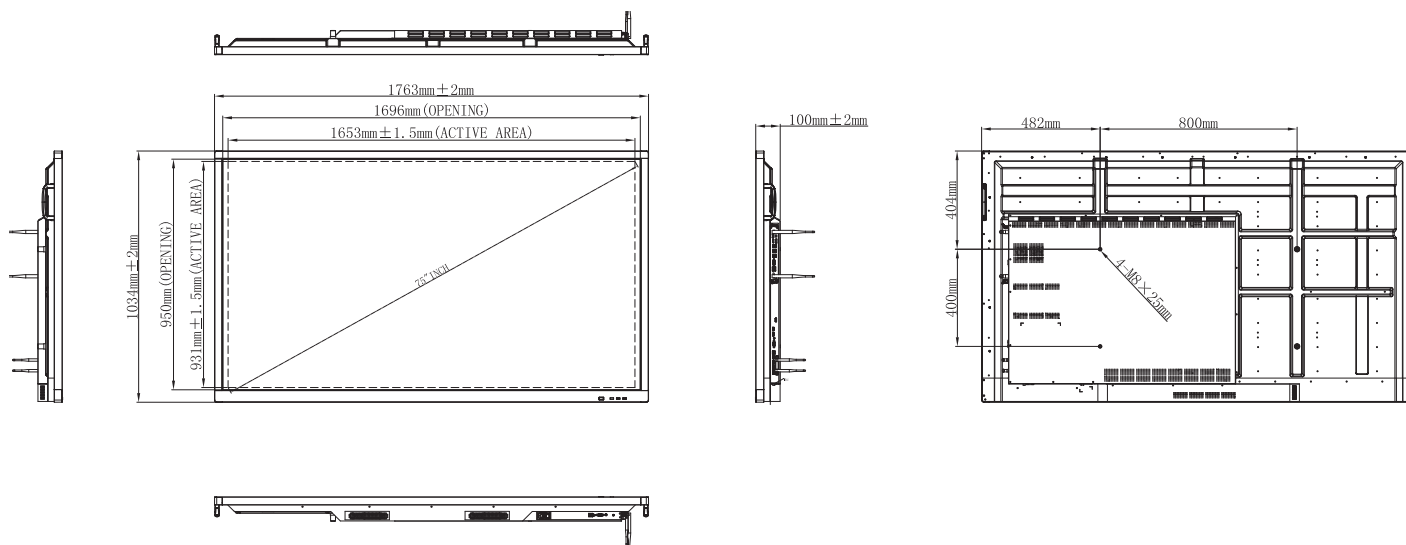

REV-8X862

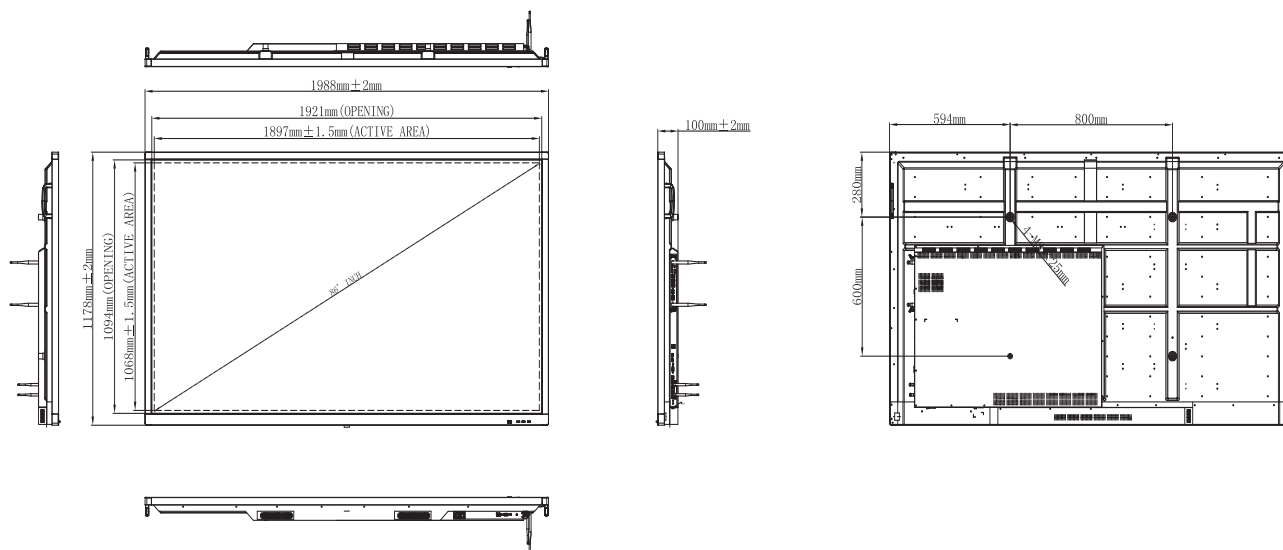

CLEVER INTERACTIVE
DISPLAYS THAT INSPIRE
LEARNING.

Our displays modernize your boardroom or meeting room space with the latest technology and create a highly engaged experience. RevTouch eliminates all of the logistical headaches and challenges with traditional displays. Simple to use, easy to install, and incredibly low maintenance. No annual software subscriptions or difficult software to learn.